### Coordination Office Charging Interface



 Confidentiality rating
 Status
 Version
 Date

 Public
 Final
 1.1.1.1
 2023-10-10

## **CharlN Implementation Guide CCS Basic**

### **Content Overview**

List of figur	es	2
	es	
Abbreviatio	ons	4
Definitions		5
1	Introduction	
1.1	The Role of CharlN and the CCS Roadmap	6
1.2	Scope and Audience of the Document	
2	The CCS Basic Application Profile	
2.1	CCS Basic charging functions	
2.1.1	General characteristics of CCS Basic	
2.1.2	Charging modes used with CCS Basic	
2.1.3	Charging Communication	
2.1.4	Vehicle Connector and Inlet	14
2.2	CCS Basic Customer Features	15
2.2.1	Load Balancing	
2.2.2	Charge Authorization Mode	
2.2.3	Indication of charging power	
2.2.4	Diagnostics of faults/errors	
2.2.5	Safety and EMC	
2.3	Technical specification of the CCS Basic application profile	17
2.3.1	Implementation baseline	
2.3.2	Test Baseline	19
2.3.3	Restrictions to referred documents	20
2.3.4	Additional CharIN Guideline Documents	
2.3.5	DC EV test	21
2.3.6	AC EV test	21
2.3.7	DC EVSE test	21
2.3.8	AC EVSE test	
3	CCS Basic Conformance Testing Quality Assurance Plan	22
3.1	Recognition of CharlN testing house	
3.2	CharIN CCS Test Systems (CCTS)	
Appendix		

#### Coordination Office Charging Interface



 Confidentiality rating
 Status
 Version
 Date

 Public
 Final
 1.1.1.1
 2023-10-10

### List of figures

Figure 1 Big picture that shows the development of the combined charge within three steps and the parallel interconnected work that drives the decharging technologies from manual conductive charging today to automate	evelopment of CCS
future	7
Figure 2 Charging Interface of CCS	11
Figure 3 CharIN quality assurance plan (big picture)	
Figure 4 Motivation for the CharlN CCS Test System	
Figure 5 CCTS architecture	

### Coordination Office Charging Interface



 Confidentiality rating
 Status
 Version
 Date

 Public
 Final
 1.1.1.1
 2023-10-10

### **List of tables**

Table 1 Designation Code for Charging Modes	14
Table 2 Charging Process Control Methods	
Table 3 Designation Code for Charging Connector and Inlet	
Table 4 Non –exhaustive list of Safety standards related to CCS	
Table 5 Non – exhaustive list of EMC standards related to CCS	17
Table 6 List of standards that contain system requirement specifications relevant fo	r CCS Basic
	18
Table 7 List of standards that are the baseline for test case specifications relevant	ant for CCS
Basic	19
Table 8 Restrictions to Basic specs	20
Table 9 CharlN Guidelines	20
Table 10 SAE documents synchronized with DIN SPEC 70121:2014	26

### Coordination Office Charging Interface



 Confidentiality rating
 Status
 Version
 Date

 Public
 Final
 1.1.1.1
 2023-10-10

#### **Abbreviations**

BS

AC Alternating current

CCS Combined Charging System

**Basic Signaling** 

CCTS CharlN Conformance Test System

CP Control Pilot

CPO Charge Point Operator

DC Direct current

DIN German Institute for Standardization

Ed Edition

EIM External Identification Means (External payment)

EV Electric Vehicle

EVSE Electric Vehicle Supply Equipment

HLC High Level Communication

IC-CPD In-Cable Control and Protection DeviceIEC International Electrotechnical CommissionISO International Organization for Standardization

OEM Original Equipment Manufacturer, here automotive manufacturers

PE Protective Earth

PHEV Plug-in Hybrid Electric Vehicle
PLC Power Line Communication

PWM Pulse Width Modulation

RFID Radio Frequency Identification
SAE Society of Automotive Engineers

UL Underwriters Laboratories
US United States of America

# Confidentiality rating Status Confidentiality rating Confidentiality rating

#### **Definitions**

**CCS Application Profile:** is defined by a set of CCS charging functions and customer features and the related system requirement specifications and test specifications.

**CCS charging function**: CCS specific implementation of a technical charging function of the charging interface that is essential to run a charging process.

**Charging Technology**: is defined by the method of coupling between EV and EVSE to enable energy transfer (manual, automatic or wireless), by the position of the coupling and by the type of charging coupler (e.g. uncooled/cooled CCS vehicle connector and Combo vehicle inlet, coils on EV and EVSE, pantograph coupler). Note: The CCS charging technologies are not identical with the charging modes as defined in IEC 61851-1 Ed.3, but they do comprise these. For example, the charging technology "manual conductive charging" comprises the charging modes 2, 3 and 4.

Note: The CCS charging technologies are not identical with the charging modes as defined in IEC 61851-1 Ed.3, but they do comprise these charging modes. For example, the charging technology "manual conductive charging" comprises the charging modes 2, 3 and 4.

**Customer Feature**: charging feature or service that is experienced by the customer that uses CCS charging products, e.g. an EV driver (e.g. Plug&Charge, or optimized charging to lower the cost), a fleet operator (resumed charging, pre-conditioning) or a charge point operator (load levelling).

# Confidentiality rating Public Coordination Office Charging Interface CHARIN Date 1.1.1.1 2023-10-10

#### 1 Introduction

#### 1.1 The Role of CharlN and the CCS Roadmap

ore and more countries push the development of electromobility solutions to substitute road vehicles with traditional combustion engines and therewith lower the overall CO<sub>2</sub> fingerprint. To ensure a flexible and long-distance mobility to the user of an electric vehicle (EV) or plugin hybrid electric vehicle (PHEV), EVs, PHEVs and electric vehicle supply equipment (EVSE) needs to be implemented using a suitable charging technology which conforms to standards. The trust of EV users in the ecosystem of electromobility can only be gained, if charging is safe, does always work, performs reliably and does not disturb other electrical equipment. Hence, national and international standardization efforts have experienced considerable progress in recent years to specify technical system requirements for the charging interface and according conformance tests that ensure safety and interoperability at the EV/EVSE interface, a reliable performance of the charging process and electromagnetic compatibility of the charger.

CharIN has the mission to develop and establish the Combined Charging System (CCS) as a global standard for charging EVs. CCS is based on open and universal standards for EVs and EVSEs that are developed in several different national and international standardization bodies. The development and launch of CCS charging products, like electric vehicles, charging stations, charging system components or charging services, is based on the parallel interconnected work in different organizations, which can be assigned to five areas of activities:

- a) Legislation
- b) Standardization
- c) Representation of interests (stakeholders of the charging ecosystem)
- d) Research (cooperation of companies and universities) and
- e) Product development (of manufacturers of charging products)

The output of all these activities contributes to the successful implementation and worldwide distribution of CCS. CharIN is representing the interests of around 180 member companies from all over the world and is therefore contributing to the activities in area C.

CCS and the corresponding standards evolve with time, thereby enabling the development and launch of new CCS charging functions and related charging technologies as well as additional customer features based on CCS at different points in time. Due to the mutual dependencies between different market players in the charging ecosystem, it is essential to consolidate the parallel activities in the different organizations, in order to introduce CCS charging products into the market at a given point in time. In particular, for a series production of EVs and EVSEs that use CCS for the charging interface or other CCS charging products, a need is given to:

# CharIN Implementation Guide CCS Basic Coordination Office Charging Interface Confidentiality rating Status Version Date Public Final 1.1.1.1 2023-10-10

- fix a set of technical CCS charging functions that can be implemented,
- fix (a set of) related charging technologies,
- fix a set of related additional customer features (charging services, such as Plug&Charge),
- and fix the matching set of standards as an implementation and test baseline at a defined point in time.

As an independent association - outside of the standardization activities - CharlN is defining the overall application profile to establish CCS in the market based on the existing standards and is therewith building a bridge between different standards and the markets.

CharlN is defining several steps at which an evolutionary stage of CCS is fixed. In a modular approach, six different charging technologies are identified, covering the currently available manual conductive charging technologies as well as future automated charging technologies. In a first attempt, CharlN distinguishes three major development steps of CCS, denoted as "CCS Basic", "CCS Extended" and "CCS Advanced". At each step, new CCS charging technologies and customer features are enabled through new CCS charging functions, which are specified in certain releases of standards. For each of these steps, CharlN is defining an application profile based on existing standards that are relevant for the respective charging technologies and customer features, and that serve as implementation and test baseline for manufacturers of charging products. Where considered necessary, e.g. due to gaps in the existing standards, CharlN provides implementation guides as well as test case specifications. Figure 1 shows a big picture that illustrates the stepwise development of CCS, which leads to a CCS roadmap, in which parallel interconnected work is performed in the five areas mentioned above.

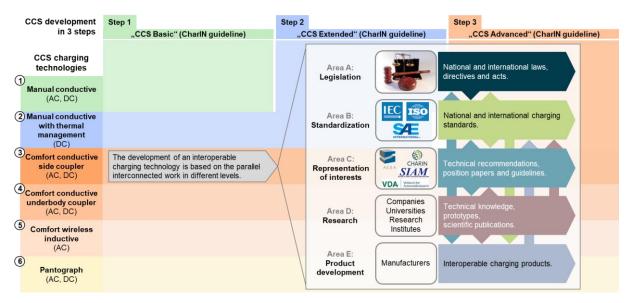


Figure 1 Big picture that shows the development of the combined charging system (CCS) within three steps and the parallel interconnected work that drives the development of CCS charging technologies from manual conductive charging today to automated charging in the future.

#### Coordination Office Charging Interface



 Confidentiality rating
 Status
 Version
 Date

 Public
 Final
 1.1.1.1
 2023-10-10

The success of the CCS relies on system requirement specifications that ensure the following essential **charging system properties**:

- Electrical safety
- Interoperability
- Performance (including reliability and robustness) and
- Electromagnetic compatibility (EMC)

Furthermore, for each CCS development step, **CCS charging functions**, i.e. the specific implementation of the **technical charging functions** 

- charging communication (digital communication and/or basic signaling)
- power transfer (charging sequences and power quality)
- physical coupling (through a charging coupler and a charging cable) need to be specified.

For the convenience of the customer, also proper **customer labels** of CCS charging products need to be defined, which contain e.g. information about the available charging power.

CharIN relies on the technical specification work that is done in the standardization committees and focuses on providing guidance, combining the technical specifications that are relevant for a certain CCS development step into an application profile. Each CCS application profile comprises specifications of CCS charging functions as well as requirements that ensure the essential charging system properties.

Conformance, robustness and interoperability tests of CCS charging products of different manufacturers at the charging interface are considered essential to ensure a safe and reliable charging experience for the customer (EV user) of these products.

. To facilitate conformance testing of the charging process, CharlN is developing a HW and SW specification for a CharlN CCS Test System (CCTS) that is intended to be used for partially or fully automatable tests of the CCS charging functions related to the respective CCS development step. The test system is able to emulate the behavior of an EV (EVSE) which allows to test the behavior of an EVSE (EV) with almost every possible sequence of a charging process at the charging interface.

Furthermore, CharlN is defining a qualification process for testing houses that can test and certify CCS charging products using recognized CCTS. The aim of the CharlN Quality Assurance Program is to ensure a high level of interoperability and to protect the value of the CharlN brand and CCS technology. This is achieved through a combination of charging system interoperability and performance testing with a recognized CCTS and manufacturer declaration of conformity.

# Confidentiality rating Confid

#### 1.2 Scope and Audience of the Document

This document provides an Implementation Guide for the **CCS Basic Application Profile** (CCS Basic), i.e. the first step in the CCS roadmap. The core charging technology of CCS Basic is **manual conductive charging**.

CharIN understands CCS Basic as the overall application profile spanning a set of published standards, as fixed on the 31st of January 2020, which comprise system requirement specifications and test case specifications that are relevant for the CCS Basic charging functions and customer labels, and ensure above listed charging system properties. The referenced standards constitute the baseline for the implementation and according conformance tests of the CCS Basic charging products

- DC EVSE
- DC EV
- AC EVSE
- AC EV (with Combo inlet)

that are used for manual conductive charging.

In addition to the listed standards (i.e. the baseline CCS Basic V1.0), CharlN is providing implementation guides to standards and according test case specifications, where considered necessary.

The scope of this document is to provide all relevant information related to the **CharlN CCS Basic Application Profile**, as well as information on the CharlN CCS test system and the CharlN Qualification Process to

- Implementors of CCS Basic charging products (EV, EVSE, charging system components or charging services)
- Implementors of test equipment
- Institutions that are executing tests (e.g. testing houses)

# Confidentiality rating Confid

The document is structured according to the different audiences.

#### In the present document, CharlN

defines the application profile CCS Basic, which comprises the CCS charging technology Manual Conductive Charging (AC and DC) with the charging modes 2, 3 and 4 (as defined in IEC 61851-1 Ed.3);

- defines the CCS charging functions and CCS customer features related to CCS Basic, provides the corresponding technical implementation and test baseline for manufacturers of charging products (EV, EVSE), referencing the relevant standards for CCS Basic;
- provides information on not relevant sections/content of the referenced standards, if necessary;
- references the relevant CharlN documents, that contain guidelines of how to implement the requirements in the standards or CharlN test case specifications
- references the relevant CharlN guides for conformance testing that specify which
  conformance tests need to be implemented by CCTS manufacturers and which
  conformance tests need to be passed by a particular CCS Basic charging product (e.g.
  a DC EVSE with CCS Basic charging functions)
- provides the reference to the hardware specification for a CCTS for manufacturers of test equipment, and
- provides the reference to the Quality Assurance Plan, which describes how testing houses can be accredited by CharlN to test charging products with CharlN certified CCTS.

To close the most critical gaps in the standards and improve product quality, the currently available additional CharlN documents focus on the interoperable implementation and automated conformance test of the **charging communication** and **power transfer** of **DC CCS Basic EVSE**.

For the purpose of charging product certification, CharlN provides according test case specifications for tests that can be conducted with a CCTS.. The CCS Basic certificate will be granted after successful testing of DC EVSE if the manufacturers, respectively applicants for the CharlN CCS Basic Conformance Test label provide a declaration that all safety and EMC, as well as other relevant requirements comprised in the implementation baseline CCS Basic V1.0 are fulfilled, which are not tested by the CCTS. The CharlN test cases that have to be passed by a DC EVSE to obtain a CCS Basic V1.0 certificate are defined in the document "CharlN Conformance Test for DC CCS Basic EVSE".

CharIN implementation guides and test case specifications for DC CCS Basic EV, as well as AC CCS Basic EVSE and EV are under consideration. Furthermore, other charging system properties, such as EMC of the charger, and requirements of other CCS Basic charging functions, such as the interoperability and robustness of the vehicle connectors and inlets, or robustness of the charging cables, may be addressed in future CharIN implementation guides and test case specifications.

# CharIN Implementation Guide CCS Basic Coordination Office Charging Interface CHARIN Confidentiality rating Status Version Date Public Final 1.1.1.1 2023-10-10

### 2 The CCS Basic Application Profile

### 2.1 CCS Basic charging functions

In this section an overview of the characteristics of CCS Basic and of the CCS Basic charging functions and customer features is given.

#### 2.1.1 General characteristics of CCS Basic

Within CCS Basic, conductive AC and DC charging is combined in a single vehicle inlet. The CCS includes the connector and inlet combination as well as all the charging control functions. It also manages the communication between the electric vehicle and the infrastructure. The key features of the CCS for manual conductive charging using the CCS Basic application profile will be explained in the following chapters.

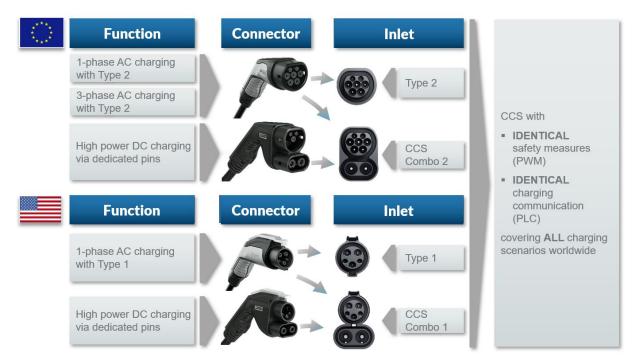


Figure 2 Charging Interface of CCS

The combined inlet of CCS is designed as a universal charging interface. The vehicle inlet for AC charging, as described in IEC 62196-2 has been extended by two pins for DC charging to allow high power charging in a very short period of time.

CCS is therefore an integrated solution for AC- and DC-charging. EVs are "CCS-capable" if they support either

 AC charging with Type 1 (US) or Type 2 (Europe) Connector according to IEC 62196-2 or

# Confidentiality rating Public Coordination Office Charging Interface CHARIN Date 1.1.1.1 2023-10-10

DC charging with Combo 1 (US) or Combo 2 (Europe) Connector in IEC 62196-3

The vehicle inlet features protective mechanisms for safe charging and is fitted with all the necessary pins for charging scenarios worldwide. A lock system prevents the connector from being accidentally pulled out of the inlet while charging. The charging process is controlled by special electrical signals from the moment the connector is connected to the inlet until the end of charging. The system also features digital communication via power line communication (PLC) between vehicle and charging station. This allows charging control for complex charging scenarios and is prepared for future demands.

#### 2.1.2 Charging modes used with CCS Basic

Four charging modes are defined in IEC 61851-1 Ed.1. Modes 1 to 3 relates to charging with a charger unit installed in the vehicle (on-board charger), Mode 4 describes the use of an "off-board charger".

The charging Mode 2, Mode 3 and Mode 4 are part of the CCS Basic Application Profile.

#### Coordination Office Charging Interface



Confidentiality rating	Status	Version	Date
Public	Final	1.1.1.1	2023-10-10

#### Mode 2 is characterized as follows:

- AC charging at normal mains outlets
- charger cable with integrated safety devices in an in-cable control box comprising RCD, control pilot and proximity detection



Figure 3b - Mode 2 Charging

#### Mode 3 is characterized as follows:

- AC charging at Type 1/2 interfaces
- safety equipment is not always in the charging station but often in the electrical installation, no in-cable control box required in the cable
- Type 2 plug interlock permits unsupervised operation, even in a public space





Figure 3c - Mode 3 Charging

#### Mode 4 is characterized as follows:

- DC charging stations
- Charging system can manage various charging currents and charging voltages to adopt various battery systems
- For charging control HLC is required



Figure 3d - Mode 4 Charging

# Confidentiality rating Confid

The designation codes in Table 4 are used to name the features for the Charging Modes.

**Table 1 Designation Code for Charging Modes** 

Description	Designation Code
Mode 2 Charging	Mode 2
Mode 3 Charging	Mode 3
Mode 4 Charging	Mode 4

#### 2.1.3 Charging Communication

The following charging control methods are part of CCS Basic:

- basic signaling (BS) based on pulse width modulation (PWM) on one control pilot (CP) line
- digital communication (high level communication HLC) based on power line communication (PLC) on the CP line using HomePlug GreenPHY (HPGP) technology as specified in DIN SPEC 70121.

Table 1 list the charging process control methods which are part of the CCS Basic Application Profile.

**Table 2 Charging Process Control Methods** 

Charging method	PWM	PLC			
Manual conductive AC charging	mandatory	not part of CCS Basic			
Manual conductive DC charging	mandatory	mandatory			

#### 2.1.4 Vehicle Connector and Inlet

For AC charging in Europe the CCS uses the Type 2 Inlet or the Combo 2 Inlet mated with the Type 2 Connector. For DC charging according to the CCS Basic Application Profile in Europe the CCS uses the Combo 2 Inlet mated with the Combo 2 Connector. Mainly in US according to the CCS Basic Application Profile the Type 1 Connector is used for AC and the Combo 1 is used for DC charging.

The designation codes in Table 3 are used to name the features for the Charging Connector and Inlet.

**Table 3 Designation Code for Charging Connector and Inlet** 

Description	Designation Code
Type 1/2 AC Vehicle Inlet	Type 1/2 Inlet
Combo 1/2 AC and DC Vehicle Inlet	Combo 1/2 Inlet
Type 1/2 AC Vehicle Connector	Type 1/2 Connector
Combo 1/2 DC Vehicle Connector	Combo 1/2 Connector

# Confidentiality rating Confid

#### 2.2 CCS Basic Customer Features

#### 2.2.1 Load Balancing

Addressed Customer: fleet operator, CPO.

The CCS Basic Application Profile supports unscheduled load balancing.

**Unscheduled Load Balancing** is characterized as follows:

The EVSE can change the maximum current / power during the charging process:

- for AC charging through adjustment of the duty cycle (according to IEC 61851-1 Ed.3, Annex A),
- for DC charging through digital communication of the new maximum current and power limits, which can be lower but not higher than the current and power limits communicated at the beginning of the charging session (refer to DIN SPEC 70121:2014).

#### 2.2.2 Charge Authorization Mode

Addressed Customer: EV user.

The CCS Basic Application Profile supports the authorization with External Identification Means, if required (e.g. for public charging).

**External Identification Means** (EIM) is characterized as follows:

• Any mechanism not involving the EV, that authorizes a user for charging (e.g. RFID, QR code, mobile app, credit card, cash payment...)

Note: In an upcoming CCS application profile, the charge authorization will become seamless for the customer

using PnC, where data security is ensured through encryption.

#### 2.2.3 Indication of charging power

Addressed Customer: EV user.

The CCS Basic Application Profile provides a rough indication of the DC charging power through CharlN Power Class Labels.

**CharIN Power Class Labels**: CharIN has defined DC CCS Power Classes, which are assigned to DC EVSE based on the operating range of the DC EVSE.

#### 2.2.4 Diagnostics of faults/errors

Addressed Customer: fleet operator, CPO.

The CCS Basic Application Profile allows Basic Diagnostics of faults and errors of the EVSE and of the EV.

**Basic Diagnostics** is realized through the definition of different states that can be signaled by EV and EVSE using the control pilot line (refer to IEC 61851-1 Ed.3, Annex A):

• The EVSE can signal state E for error, state F for fault, and a state change X2 → X1 to indicate e.g. an emergency shutdown.

The EV can signal a state change B  $\square$  C to indicate that the EV is not ready for charging or to trigger an emergency shutdown.

# CharlN Implementation Guide CCS Basic Coordination Office Charging Interface CHARIN Confidentiality rating Public Coordination Office Charging Interface CHARIN Date Final 1.1.1.1 2023-10-10

#### 2.2.5 Safety and EMC

The current document focuses on interoperability aspects of the CCS. Apart from interoperability charging systems must also comply with safety and electromagnetic compatibility requirements to ensure a safe and reliable operation.

Safety standards prescribe various safety measures to avoid;

- Electric Shock
- Fire
- Electric Arc and
- Overheating

under normal use und certain fault condition including charging and non-charging operation. Table 4 gives non exhaustive overview of some of the major safety standards. In addition, regional or national requirements might apply.

Table 4 Non -exhaustive list of Safety standards related to CCS

Description	International standards	US standards			
Electrical safety of the EVSE	IEC 61851-1	UL 2202			
	IEC 61851-23	UL 2231-1/2			
Plugs, outlets, connector &	IEC 62196-1	SAE 1772,			
inlets for EVSE (Safety)		UL 2251 IEC 62196-1			
Plugs, outlets, connector &	IEC 62196-3	SAE 1772, IEC 62196-3			
inlets for EVSE					
(Dimensions)					
Cables	IEC 62893	UL 62			
Electrical safety of the EV	ISO 6469-3	UL 2202			
		UL 2231-1/2			
Connection to an external	ISO 17409	ISO 17409			
electric					
power supply					
In-cable control and	IEC 62752	N/A			
protection device for mode 2					
charging of electric road					
vehicles (IC-CPD)					

EMC standards prescribe various requirements to protect essential radio service and ensure safe operation even when the charging system is exposed to interference from other sources. Amongst other the following effects are addressed;

- Conducted emission on mains and control and signal ports
- Radiated emission
- Electrostatic discharge
- Overvoltage and surges on mains
- Exposure to RF sources such as mobile phones
- Power quality

# CharIN Implementation Guide CCS Basic Coordination Office Charging Interface CHARIN Confidentiality rating Status Version Date Public Final 1.1.1.1 2023-10-10

under normal use condition including charging and non-charging operation. Table 5 gives non exhaustive overview of some of the major EMC standards. In addition, regional or national requirements might apply.

Table 5 Non - exhaustive list of EMC standards related to CCS

Description	International standards	US standards			
EMC of On-Board Charger					
Emission	IEC 61851-21-2	tbd			
Immunity	IEC 61851-21-2	SAE 1772, UL 2231-2			
Power quality	IEC 61851-21-2	SAE 1772, UL 2231-2			
Immunity	tbd	SAE 1772, UL 2231-2			

The user of this document has the responsibility to make sure that all legal requirements that may apply to the charging system for the target market are considered.


### 2.3 Technical specification of the CCS Basic application profile

CharIN defines CCS Application Profiles based on sets of existing standards with focus on the charging interface The following tables show the set of standards, as fixed by CharIN at January, 31st, 2020, that constitute the baseline for the implementation and according conformance tests related to the CCS Basic Application profile. The complete overview of related standards and CharIN documents can be found here.

CharlN Implementation Guide CCS Basic	Coordination Office Charging Interface		CHARIN
Confidentiality rating	Status	Version	Date
Public	Final	1.1.1.1	2023-10-10

#### 2.3.1 Implementation baseline

Table 6 List of standards that contain system requirement specifications relevant for CCS Basic

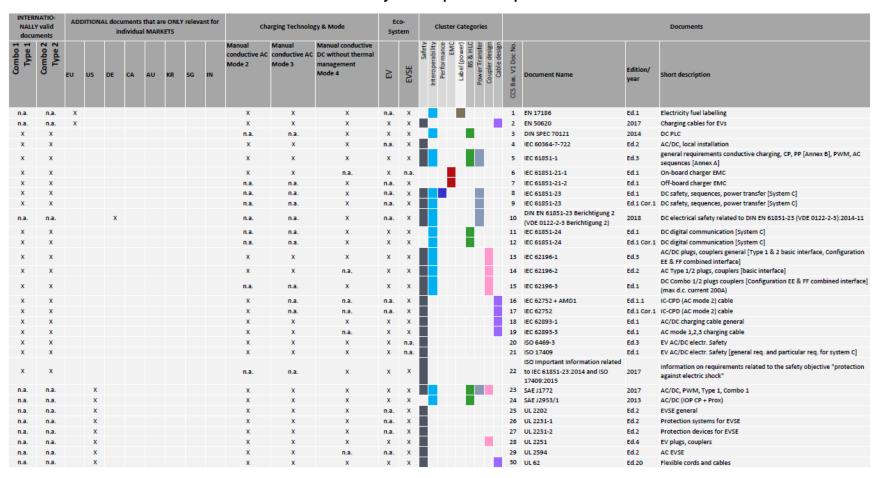

CharlN Implementation Guide CCS Basic	Coordination Office Charging Interface		CHARIN
Confidentiality rating	Status	Version	Date
Public	Final	1.1.1.1	2023-10-10

#### 2.3.2 Test Baseline

Table 7 List of standards that are the baseline for test case specifications relevant for CCS Basic.

NAL	RNATIO- LY valid Iments	ADE	ADDITIONAL documents that are ONLY relevant for individual MARKETS							Charging Technology & Mode					o- tem	Cluster Categories	Documents			
Combo 1 Type 1	Combo 2 Type 2	EU	US	DE	CA	AU	KR	SG	IN	Manual conductive AC	Manual conductive AC Mode 2	Manual conductive AC Mode 3	Manual conductive DC without thermal management Mode 4	EV	EVSE	Interoperability Performance EMC Label (power) BS & HIC Power Transfer Couplet design Cable design	CCS Bas. VI Doc No.	Document Name	Edition/ year	Short description
n.a.	n.a.	X								X	X	X	X	X	X		2	EN 50620	2017	Charging cables for EVs
X	X									n.a.	n.a.	n.a.	X	X	X		31	DIN SPEC 70122	2018	DC PLC
X	X									X	x	X	X	n.a.	X		4	IEC 60364-7-722	Ed.2	AC/DC, local installation
x	X									x	x	x	х	X	X		5	IEC 61851-1	Ed.3	general requirements conductive charging, CP, PP [Annex B], PWM, AC sequences [Annex A]
X	X									X	X	X	n.a.	X	n.a.		6	IEC 61851-21-1	Ed.1	On-board charger EMC
X	X									n.a.	n.a.	n.a.	X	n.a.	X		7	IEC 61851-21-2	Ed.1	Off-board charger EMC
X	X									n.a.	n.a.	n.a.	X	n.a.	Х		32	DIN VDE V 0122-2-300	2016	DC sequences, power transfer [System C]
×	X									x	x	x	х	X	X		13	IEC 62196-1	Ed.3	AC/DC plugs, couplers general [Type 1 & 2 basic interface, Configuration EE & FF combined interface]
X	X									X	X	x	n.a.	X	Х		14	IEC 62196-2	Ed.2	AC Type 1/2 plugs, couplers [basic interface]
x	x									n.a.	n.a.	n.a.	x	x	X		15	IEC 62196-3	Ed.1	DC Combo 1/2 plugs couplers [Configuration EE & FF combined interface] (max d.c. current 200A)
X	X									X	X	n.a.	n.a.	n.a.	X		16	IEC 62752 + AMD1	Ed.1.1	IC-CPD (AC mode 2) cable
X	X									X	X	X	X	X	X		18	IEC 62893-1	Ed.1	AC/DC charging cable general
X	х									X	X	X	n.a.	X	X		33	IEC 62893-2	Ed.1	AC mode 1,2,3 charging cable
X	X									X	X	X	X	X	n.a.		20	ISO 6469-3	Ed.3	EV AC/DC electr. Safety
X	X									X	X	X	Х	X	n.a.		21	ISO 17409	Ed.1	EV AC/DC electr. Safety [general req. and particular req. for system C]
n.a.	n.a.		X							X	X	x	х	X	Х		23	SAE J1772	2017	AC/DC, PWM, Type 1, Combo 1
n.a.	n.a.		X							X	X	X	X	X	X		34	SAE J2953/2	2014	AC/DC (IOP CP + Prox) test procedures
n.a.	n.a.		X							X	X	X	X	n.a.	X		25	UL 2202	Ed.2	EVSE general
n.a.	n.a.		Х							X	X	X	X	n.a.	X		26	UL 2231-1	Ed.2	Protection systems for EVSE
n.a.	n.a.		X							X	X	X	Х	n.a.	X		27	UL 2231-2	Ed.2	Protection devices for EVSE
n.a.	n.a.		X							X	X	X	Х	X	X		28	UL 2251	Ed.4	EV plugs, couplers
n.a.	n.a.		X							x	X	x	n.a.	n.a.	X		29	UL 2594	Ed.2	AC EVSE
n.a.	n.a.		X							x	x	Х	х	X	X		30	UL 62	Ed.20	Flexible cords and cables

# Coordination Office Charging Interface Basic Coordination Office Charging Interface Coordination Office Charging Interface Confidentiality rating Status Version Date Public Final 1.1.1.1 2023-10-10

#### 2.3.3 Restrictions to referred documents

The following sections and contents are not part of the CCS Basic application profile.

#### **Table 8 Restrictions to Basic specs**

IEC 61851-1 Ed.3	Annex D	
IEC 61851-23 Ed.1	System A and B	
IEC 62196-1 Ed.3	Configuration AA, BB, CC, DD	
IEC 62196-3 Ed.1	Configuration AA, BB, CC, DD	

#### 2.3.4 Additional CharlN Guideline Documents

#### **Table 9 CharlN Guidelines**

Document	Spec. related	Test related	Version 1.0, as of 31.03.2020	Version 1.1, as of 01.08.2021	V 1.1.1, as of 17.03.2022
CharIN Implementation Guide for CCS Basic			1.0	1.0.1	1.0.2
CharIN Conformance Test for DC CCS Basic EVSE			1.1.1	1.1.5	<mark>1.1.6</mark>
CharIN Implementation Guide to DIN 70121	Х		0.95	0.95	0.95
CharIN TC for DIN 70121 Implementation Guide		Х	1.1.0	1.1.2	1.1.3
CharIN DC CCS Power Classes	Х		6.0	6.0	6.0
CharlN TC for IEC 61851-1 & -23		Х	0.7	1.0.0	1.0.1
CharIN CCTS Specification	Х		0.4.0	0.4.0	0.4.0
CharIN IEC61851-23:2014 Implementation guide for system C*	Х		1.0.0	1.2.0	1.2.0
CharIN CCS design guide for CCS	Х		7.0	7.0	7.0
CharIN Guideline DC CCS 1.0 (related to DIN SPEC 70121)	X		1.6	1.6	1.6
CharIN Conformance Tests – Vehicle Coupler		Х	-	4.0	<mark>5.0</mark>

The CharlN guideline documents are available for members only. The experts in the technical working groups have worked out the necessary details to create an interoperable charging

Coordination Office Charging Interface



Confidentiality rating	Status	Version	Date
Public	Final	1.1.1.1	2023-10-10

system by following the above listed additional recommendations. Please contact the CharlN Coordination Office in terms of questions about the membership application.

#### 2.3.5 DC EV test

Under preparation.

#### 2.3.6 AC EV test

Under preparation.

#### 2.3.7 DC EVSE test

The test system specification focuses on DC EVSE conformity with the related documents of interoperability and safety of the charging communication, the power transfer and the charging sequence. Future documents will contain DC EV (for DC charged electric vehicles) as well as AC charged EV and the related EVSE as described in the picture below. For a complete list of required test cases the "CharlN Conformance Test DC CCS Basic EVSE" document is mandatory.

A charging station supporting DC CCS Basic must pass the selected test cases from:

- DIN SPEC 70122:2017 -> for SECC side.
- DIN VDE V 0122-2-300 -> DC CCS Basic EVSE Test cases
- CharlN TC for DIN 70121 Implementation Guide
- "CharIN TC for IEC 61851-1 & -23" -> CharIN Test Cases for AC charging with PWM (IEC 61851-1) and DC charging with system C (IEC 61851-23)
- IEC61851-21-2

#### 2.3.8 AC EVSE test

Under preparation

Coordination Office Charging Interface



 Confidentiality rating
 Status
 Version
 Date

 Public
 Final
 1.1.1.1
 2023-10-10

### 3 CCS Basic Conformance Testing Quality Assurance Plan

CharIN establishes and operates the global conformance testing process to provide the minimum level of CCS EV charging system interoperability and safety by performing test cases from

- CharIN\_Conformance\_Test\_DC\_CCS\_Basic\_EVSE
- CharIN\_Conformance\_Test\_DC\_CCS\_Basic\_EV [under development]
- CharIN\_Conformance\_Test\_AC\_CCS\_Basic\_EVSE [under development]
- CharIN\_Conformance\_Test\_AC\_CCS\_Basic\_EV [under development]

In terms of conformance testing, the mandatory elements are

- Qualified testing houses
- Validated test systems

QAP (Quality Assurance Plan) is the process to make assure that the above elements have the consistent interpretation and verdicts.

Quality Assurance Plan for CharlN Conformance Testing of Charging System document describe this process with impartial and transparent manner. The main activities are defined as

- Conformance testing: activities for the supply chain between EV OEM/EVSE manufacturer and Customer
- Tool Validation: activities for the supply chain between tool vendor and tool customer such as testing house, EV OEM, EVSE manufacturer, Service operator, ...
- Recognition (Evaluation): activities for the supply chain between testing house and testing service customers such as EV OEM, EVSE manufacturer, ...

CharIN test certificate for conformance testing can be issued only by CharIN recognized testing house with CharIN validated CCTS. After the successful completion of recognition and validation, CharIN approves and provides labels of "CharIN recognized testing house" and "CCTS", respectively.

For this commitment, CharIN organizes the governance structure for CCTS validation as well as testing house recognition. PAC (Peer Assessment Committee), which is the main actor to execute the main activities. It is established to evaluate the competence of testing house and the capability/functionality of CCTS under the name of CharIN.

The main objective of CharlN QAP is to achieve >95% EV-EVSE interoperability and safety by the conformance testing for happy charging experience of users.



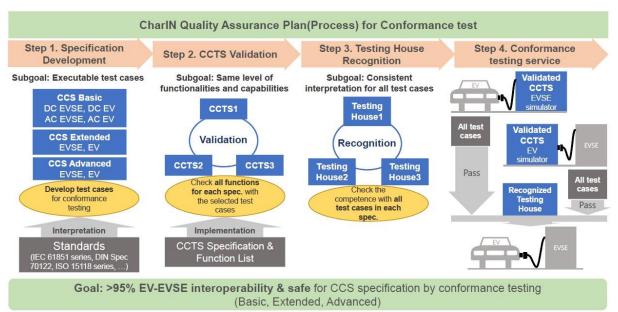


Figure 3 CharlN quality assurance plan (big picture)

### 3.1 Recognition of CharIN testing house

QAP document specifies how to evaluate the competence of testing house as the recognition process of testing houses including assessment scheme, criteria, process detail with expected schedule and re-recognition process.

All details about the recognition process are described in the document Quality Assurance Plan for CharIN Conformance Testing of Charging System.

If testing house want to offer Conformance Testing for DC CCS Basic, it has to apply at CharlN (<a href="mailto:coordination@charinev.org">coordination@charinev.org</a>) to get recognized.

CharlN Implementation Guide CCS Basic	Coordination Office Charging Interface		CHARIN
Confidentiality rating	Status	Version	Date
Public	Final	1.1.1.1	2023-10-10

#### 3.2 CharIN CCS Test Systems (CCTS)

To significantly reduce the amount of required testing in the field, CharIN is specifying a CharIN CCS Test System. The CCTS are used to test either the EVSE or the EV part. There are several vendors in CharIN that provide Test systems for this purpose. Some of them are for component testing only.

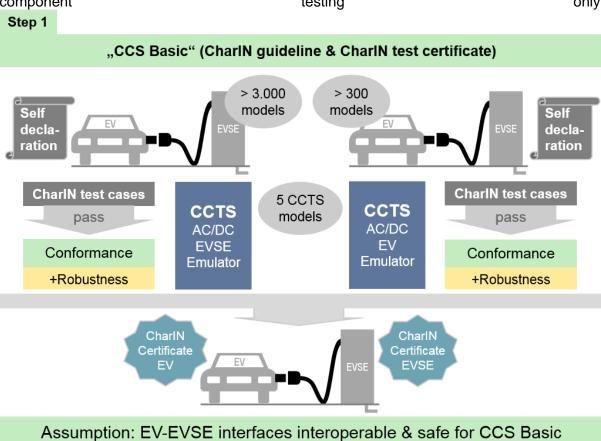


Figure 4 Motivation for the CharlN CCS Test System

#### **CCTS Open Requirements Specification**

An open and free of Charge Test equipment specification was developed by the members of CharlN. This enables a willing vendor to develop their own product with that common document as a basis.

#### **CCTS** architecture

Basic architecture of CCTS is proposed in CharIN\_CCTS\_Specification document and is composed of the below components;

# Confidentiality rating Confid

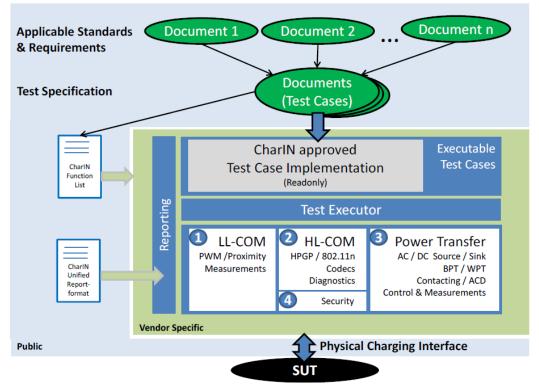


Figure 5 CCTS architecture

#### **CCTS Validation**

To assure the capability and functionality of CCTS, the validation of it is necessary and will be done under CharIN QAP. The validation of CCTS HW/SW is executed following the "Quality Assurance Plan for CharIN Conformance Testing of Charging System".

CharlN Implementation Guide CCS Basic	Coordination Office Charging Interface		CHARIN	
Confidentiality rating	Status	Version	Date	
Public	Final	1.1.1.1	2023-10-10	

### **Appendix**

The following SAE standards are synchronized with DIN SPEC 70121:2014:

Table 10 SAE documents synchronized with DIN SPEC 70121:2014

Standard	Edition	Title	Short description
SAE J2847/2	2015-04	Communication Between Plug-In Vehicles and Off-Board DC Chargers	PLC messages & signals
SAE J2931/1	2014-12	Digital Communications for Plug-in Electric Vehicles	high level requirements plus definition of com stack and SLAC
SAE J2931/4	2014-10	Broadband PLC Communication for Plug- in Electric Vehicles	PLC HPGP info